

## PH10mm SMD 3in1 Outdoor Full Color LED Display Screen

<b>Model</b>		<b>LINSN-P10-OF-960X640</b>				
<b>1.LED</b>						
Diagram	Model	Color	Intensity	View Angle	Wavelength	Test Cond.
	SMD 3535		750mcd	140/140	620nm	25°C, 20mA
			2100mcd	140/140	520nm	25°C, 20mA
			530mcd	140/140	470nm	25°C, 20mA

The Outdoor LEDs we choose have the high reliability and contrast, wide view angle and good consistency which meet the need of high brightness, high refresh rate, high gray scale and keep natural color at one time with best color uniformity.


1. High brightness  
White len, high luminous intensity
2. High contrast  
Black coating, matte encapsulation with non-mirror reflection
3. High reliability  
Dust-proof, Water-proof, UV-proof
4. Long lifespan  
Good thermal dissipation, low luminous degradation and power consumption

Other      Unit LED

Rain      Rain


Other      Unit LED

## 2.LED Module

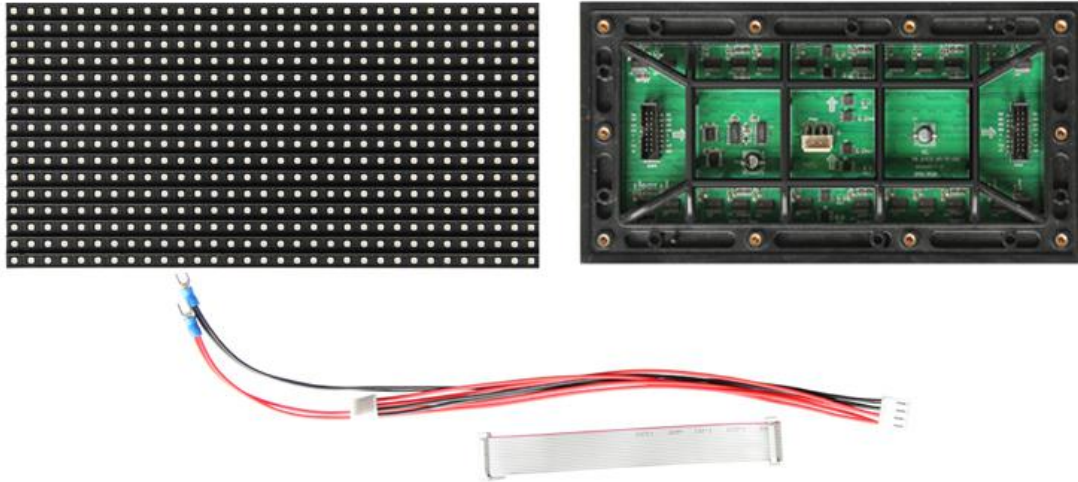

To achieve the best visual performance of our indoor and outdoor led display,we use the best Driving IC,such as MBI5124,SUM16136 with high refresh rate,high grey level with latest technology.


De-Ghosting(Lower Ghosting)

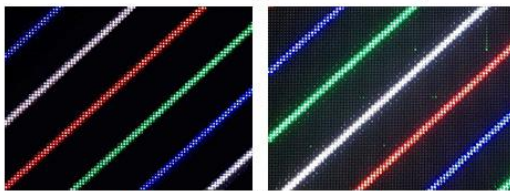

↑  
Unit LED

↑  
Common


Color Uniformity

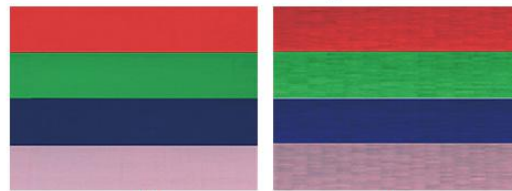

↑  
Unit LED

↑  
Common

Grey Level

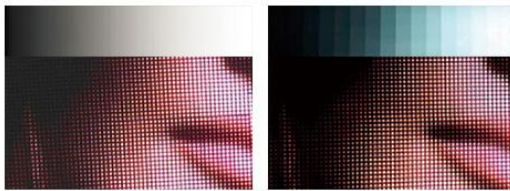

↑  
Unit LED

↑  
Common

Refresh Rate




↑  
Unit LED

↑  
Common

Resolution	32(H)×16(V)
Pitch	10mm
Density	10000 pixels/m <sup>2</sup>
LED Arrangement	SMD3535
Driver Mode	Dynamic 1/2 Duty constant current
Size	320mm×160mm
Mask	Pure Black mask-high contrast screen

### 3.LED Cabinet

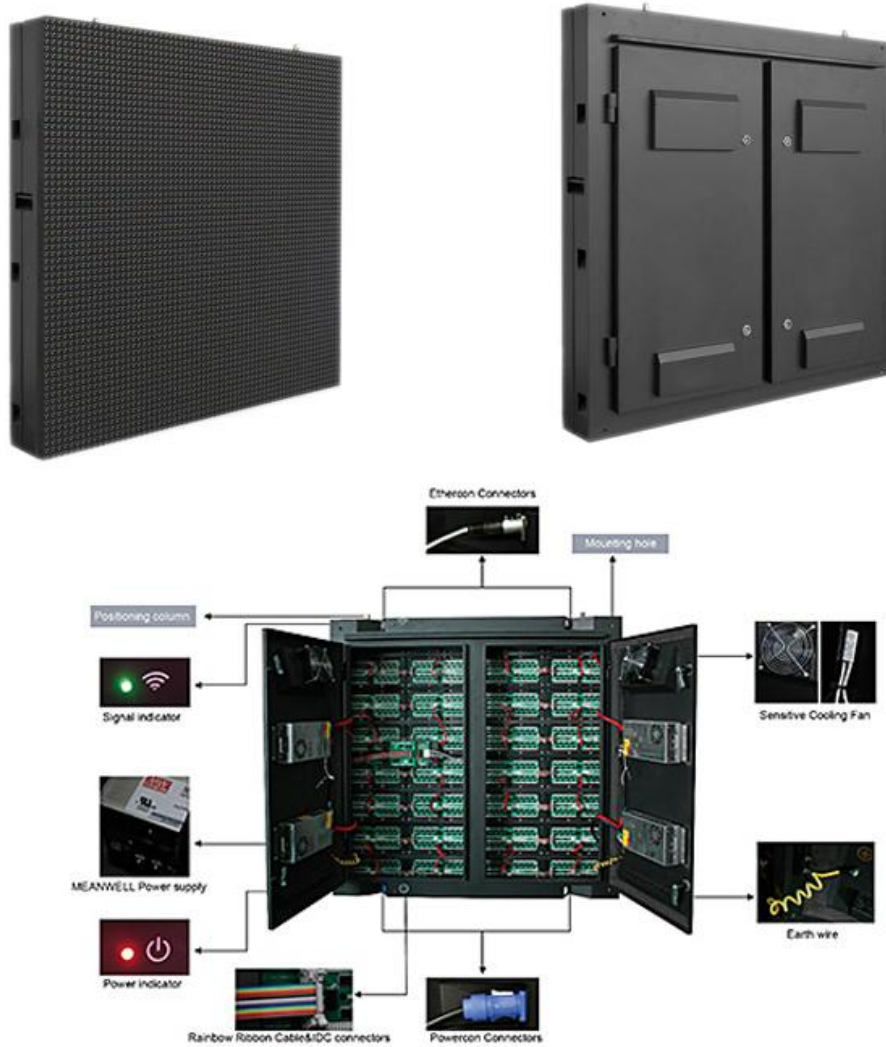


The Cabinet Pictures Only For Reference,Cabinet can be Customized

<b>Resolution</b>	<b>96(H)×64(V)</b>
<b>Size</b>	<b>960mm× 640mm</b>
LED Modules	3x4=12 pcs
Weight	About 50 kg

<b>4.Electricity Parameter</b>	
<b>Optical Ratings</b>	
Brightness	≥6500cd/m <sup>2</sup>
View Angle	140 degree ( horizontal) 140degree(vertical)
View Distance	10m-100m
Gray Scale	14bits input, correction with 16bits
Display Color	16.7M
Brightness Adjustment	0-100 levels
<b>Power Supply</b>	
Operation Power	AC100-240V 50-60HZ Switch-able
Maxim Power Consumption	880 W/m <sup>2</sup>
Average Power Consumption	350 W/m <sup>2</sup>
<b>Control System</b>	
Correction Scale Level	16bits
Frame Update Frequency	60-75Hz
Screen Refresh Frequency	960-2000Hz
Gamma Correction	-5.0—5.0
Support Input	Composite Video, S-Video, DVI, HDMI., SDI, HD_SDI
Control Distance	Ethernet cable 100m, optical fiber 5km
Support VGA Mode	800×600,1024×768,1280×1024,1600×1200
Color Temperature	5000-9300 adjustable
Brightness Correction	dot by dot, module by module, cabinet by cabinet
<b>Reliability</b>	
Operating Temp.	-20-60 Celsius degree
Operating Humidity	10-95% RH
Operating Life	100,000 hours
MTBF	5000 hours
Continuous Working Time	≥48 hours
Protection Level	IP67 Waterproof
Out of Control Pixel Rate	0.01%



◆ Solution for your 3mx0.6m LED Screen size

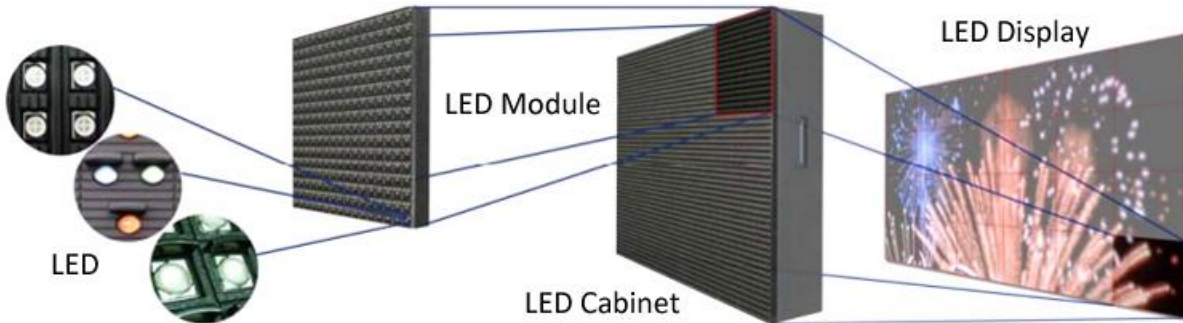


<b>Total Cabinets Quantities on the Screen(pc)</b>	<b>3x1=3 pcs</b>
<b>Total Pixels on the Screen(dot)</b>	<b>288(L) *64 (H)</b>
<b>Final LED Screen Size(m2)</b>	<b>2.88m x 0.64m</b>
<b>For your 3mx0.6m LED Screen size</b>	

**LED Displays System**


1. LED Display Body
2. Control system
3. Power Input
4. Installation Structure

For additional functions, there are relative equipments, as follows:

1. Amplifier/sound
2. Exterior Video Signal Source
3. Cooling System

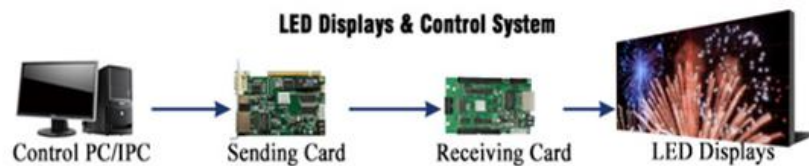

**LED Displays System Diagram**

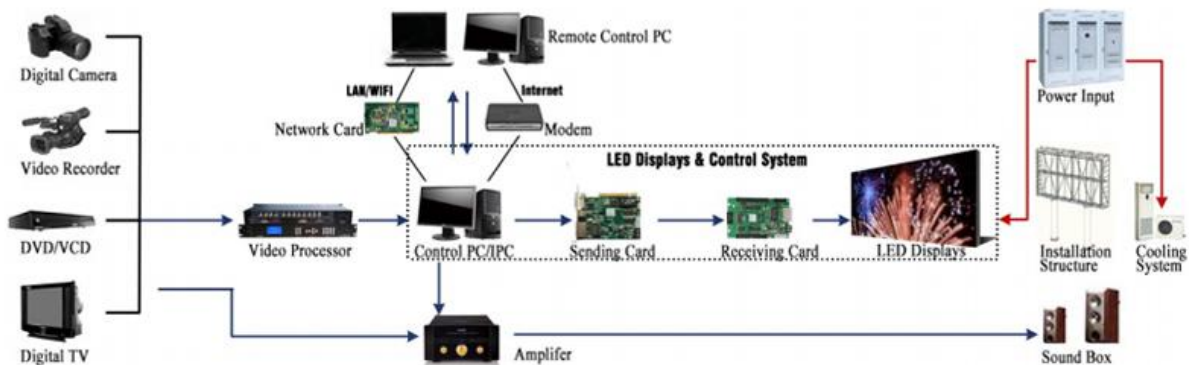

**5.Packaging**



<b>Packing Way</b>	<b>Three unit boxes packed into one</b>
<b>Packing box size (mm)</b>	<b>1050 * 1150 * 600</b>
<b>Packing box size (CBM)</b>	<b>≈0.75 CBM/box</b>
<b>Packing gross weight(kg)</b>	<b>≈160 kg/box</b>

**Quotation & Terms:**

NO	Item	Descriptions	Qty	Unit Price (USD)	Amount (USD)
1	LED Display	LED Cabinet	Size: 960mm(W) x640mm(H) Material: Steel Cabinet		3
		LED Display	<b>2.88m x0.64m</b>		
2	Control System	Data Sending box	LINSN-TS802D	1	pc
		Data Receiving Card	LINSN-RV908M	3	pc
		Multi Function Card	LINSN-EX902D with Sensor	1	Pc
		Video Processor	LVP605S with HDMI,SDI Input	1	Set
		Software	LEDStudio	1	set
3	Packing	Polywood Case(Non-Timber)	Four Units Packed into one	1	Pc
<b>Total Price</b>		<b>USD EXW SHENZHEN</b>			

**REMARKS:**

- Above price is based on **EXW Shenzhen** term, **Epistar LED, CE/UL Meanwell Power Supply, 2% Spare Parts. Wooden Box P**
- **Cabinet material:** Cold rolled steel Cabinet.
- **Payment terms:** T/T 30% as deposit before production, T/T 70% balance before delivery.
- **Production lead time :** 10-12 days after receiving 30% deposit.
- **Warranty is for 2 years**  
In the warranty time, we will maintain and replace the module for free, Customer should pay for the shipment fee. After that, we only charge the material cost, customer should be responsible for shipment.
- **Technical Service:**  
We also provide the operation manual, software, and so on. Any associated CAD drawing on how to fix up the display and some other expert suggestion will be provided upon request.
- **Free training:**  
Regarding Training course, usually we provide customer at most one week for training which includes the software operation, basic repairing, installation, adjustment, etc.
- **Technical Support:**  
We can send our engineer to guide the installation for you. But the relevant cost should be paid by your esteemed company as visa, hotel, food, plane ticket for back and forth, and also your esteemed company should pay our staff USD100/day/s (from our engineer's departure from Shenzhen) and should help to arrange our staff visa

**Spare Parts List :**

Item			Quantity	Remarks
1	1	Sending card	0	Control system backup
	2	Receiving Card & Hub Card	1	
2	3	LEDs	40	Key components of the LED Display body backup
	4	LED Module-3% Spare Parts	2	
	5	Driving IC	10	
	6	Module Mask	2	
	7	Screws of Module Mask	20	
	8	Screws for LED Module	20	
	9	LED Power Supply(PSU)	2	
	10	Cooling Fan(pcs)	2	
	11	Main Power Cable(5m Long Each)	1	
	12	Main Signal Ether RJ45Cable(20m Long)	1	
	11	PowerCon of LED Cabinet(pcs)	2	
	12	Power Cable of Module(pcs)	12	
13	EtherCon of LED Cabinet(pcs)	2		
14	Flat Data Cable(16-pin) of Module(pcs)	12		
3	16	User manual of the LED display(English version)(set)	1	User manual for the LED display's convenient using, installation , maintenance
	17	User manual of the control system(English version)(set)	1	
	18	User manual of the installation(English version)(set)	1	