


SPECIFICATIONS

DISPLAY	
Pixel Pitch	3.9mm
LED Type	3 in 1 Black SMD
LED encapsulation	SMD 2121
Pixel Configuration	1R1G1B
Brightness	900cd/m ²
Pixel Density	65.536 Pixels/m ²
Module Size	W250mm x H250mm
Module resolution	64 x 64dots
Refresh Rate	≥4000Hz
Frame Rate	50/60Hz
Panel Size	W500mm x H500mm
Pixel per panel	128x128 pixels
Weight	4.5kg/panel
Viewing Angle	160° Horizontal 60° Vertical
Power Consumption	600W/m ²
Grey Scale	16 Bit
Gamma Correction	-5.0—5.0
Support Input	Composite Video, S-Video, DVI, HDMI., SDI, HD_SDI
Control Distance	Ethernet cable 100m, optical fiber 5km
Support VGA Mode	800×600,1024×768,1280×1024,1600×1200
Color Temperature	5000-9300 adjustable
Brightness Correction	dot by dot, module by module, cabinet by cabinet
Operating Temp.	-20-60 Celsius degree
Operating Humidity	10-95% RH
Operating Life	100,000 hours
MTBF	5000 hours
Continuous Working Time	≥48 hours
Protection	>IP45
Contrast Ratio	>1000:1
Cabinet Material	Carbon Fiber
Cabinet Information	Included Usage Status Display on the back of cabinet
Design	Modular
Power Supply	Single Power Supply

CF500-Pro P3.9

LED DISPLAY INDOOR



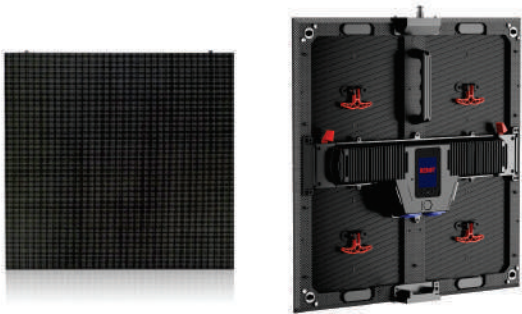

High Brightness, Excellent Image Video



Energy Saving

Indoor LED Display

- High Quality LED Display for Indoor Application
- SMD 3 in 1 LED Encapsulation Technology
- CE,Rohs Approved
- Customize Size



More Features



CONTRAST



MODULAR



LOW NOISE



24/7
OPERATION



COLOR



EASY
INSTALL



WIDE VIEW



SCALABLE